

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/008580 A1

(51) International Patent Classification⁷: **H01R 13/518**,
13/658

W. [DE/DE]; Goethestrasse 86, 40239 Dusseldorf (DE).
PLOEHN, Guenter [DE/DE]; Up de Kopeel 8, 23689
Techau (DE).

(21) International Application Number:
PCT/US2003/016296

(74) Agents: **FLORCZAK, Yen, Tong** et al.; Office of Intellect-
tual Property Counsel, Post Office Box 33427, Saint Paul,
MN 55133-3427 (US).

(22) International Filing Date: 22 May 2003 (22.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02015328.4 10 July 2002 (10.07.2002) EP

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **3M IN-
NOVATIVE PROPERTIES COMPANY** [US/US]; 3M
Center, Post Office Box 33427, Saint Paul, MN 55133-
3427 (US).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BRANDT, Konrad**,

[Continued on next page]

(54) Title: MULTIPLE WIRE CABLE CONNECTOR

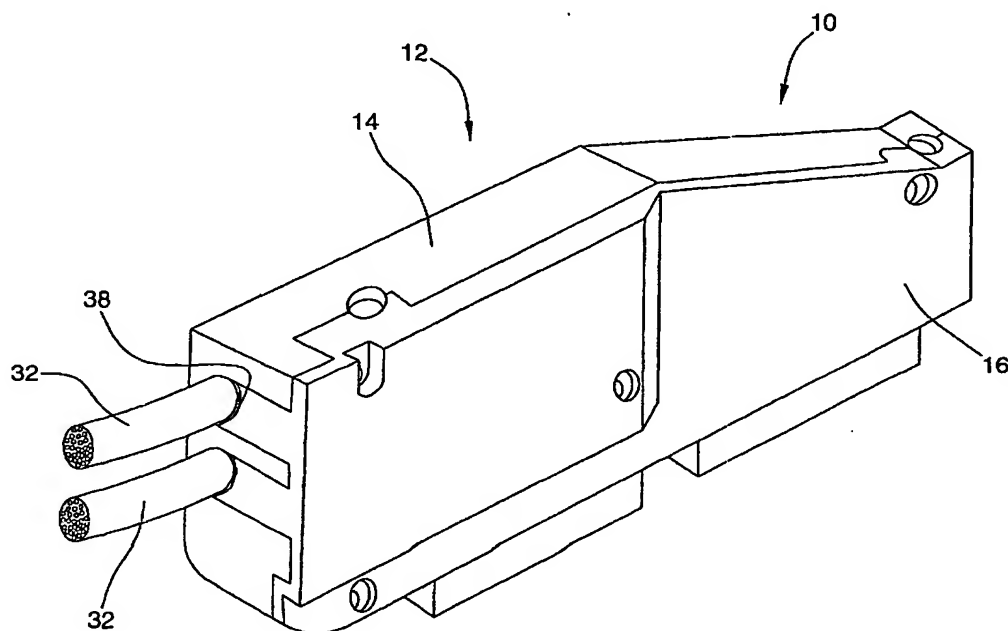

(57) Abstract: The multiple wire cable connector comprises an outer housing having at least one opening for a multiple wire cable to pass therethrough and at least one inner housing for arranging therein termination sockets of the wires of the multiple wire cable the inner housing comprising a front end for contacting a device to be electrically connected to the wires of the multiple wire cable, and a receiving end for receiving the wires of the multiple wire cable.



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*